Please let us know the circuit specifications and control sequence for setting PosiR® specifications.

1、Circuit specification

model	Working voltage (V)	Maximum voltage (V)	Maximum allowable current of power relay(Arms)	Maximum allowable current of relay(Arms)	Minimum charge voltage for load driving smoothing capacitor (Vdc)	④Smoothing capacitor maximum capacity(μF)	Operating temperature range(℃)	Number of times of application to the inrush current limiting parts	For other inrush current parts separately required specifications
							~		

2、Control sequence

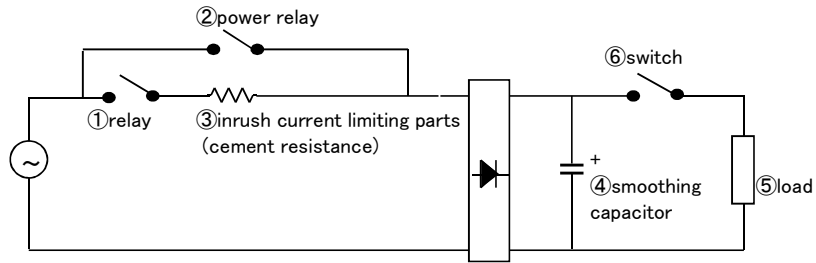| model	parts	time elapsed				
		0 ～ s	～ s	～ s	～ s	～ s
	①(③)	on / off	on / off	on / off	on / off	on / off
	②	on / off	on / off	on / off	on / off	on / off
	⑥	on / off	on / off	on / off	on / off	on / off

Fig. Circuit specification